

RED ROOSTER ASSEMBLY TOOLS

Productivity · Flexibility · Accuracy



PNEUMATIC
IMPULSE
WRENCHES



CORDLESS
IMPULSE
WRENCHES



PNEUMATIC
SCREW-
DRIVERS



CORDLESS
SCREW-
DRIVERS



CORDLESS
WRENCHES



PNEUMATIC
RIVETERS

RED ROOSTER ASSEMBLY TOOLS

Productivity · Flexibility · Accuracy


Red Rooster Assembly offers you a full range of high quality assembly tools. With years of experience in the assembly industry and through intensive cooperation with our customers, we have developed an extensive and complete range with specific attention for ergonomics, efficiency and durability. The assortment of Red Rooster Assembly tools is often complemented when new developments take place. The possibilities offered by improved battery technology have resulted in an extensive cordless range of tools. The combination of cordless tools and air tools offers the customer the opportunity to implement the most optimal solution. Whether a sustainable set up for a permanent workplace is required, or more flexibility for the operator, your productivity matters to us.



PNEUMATIC IMPULSE WRENCHES



Main Features

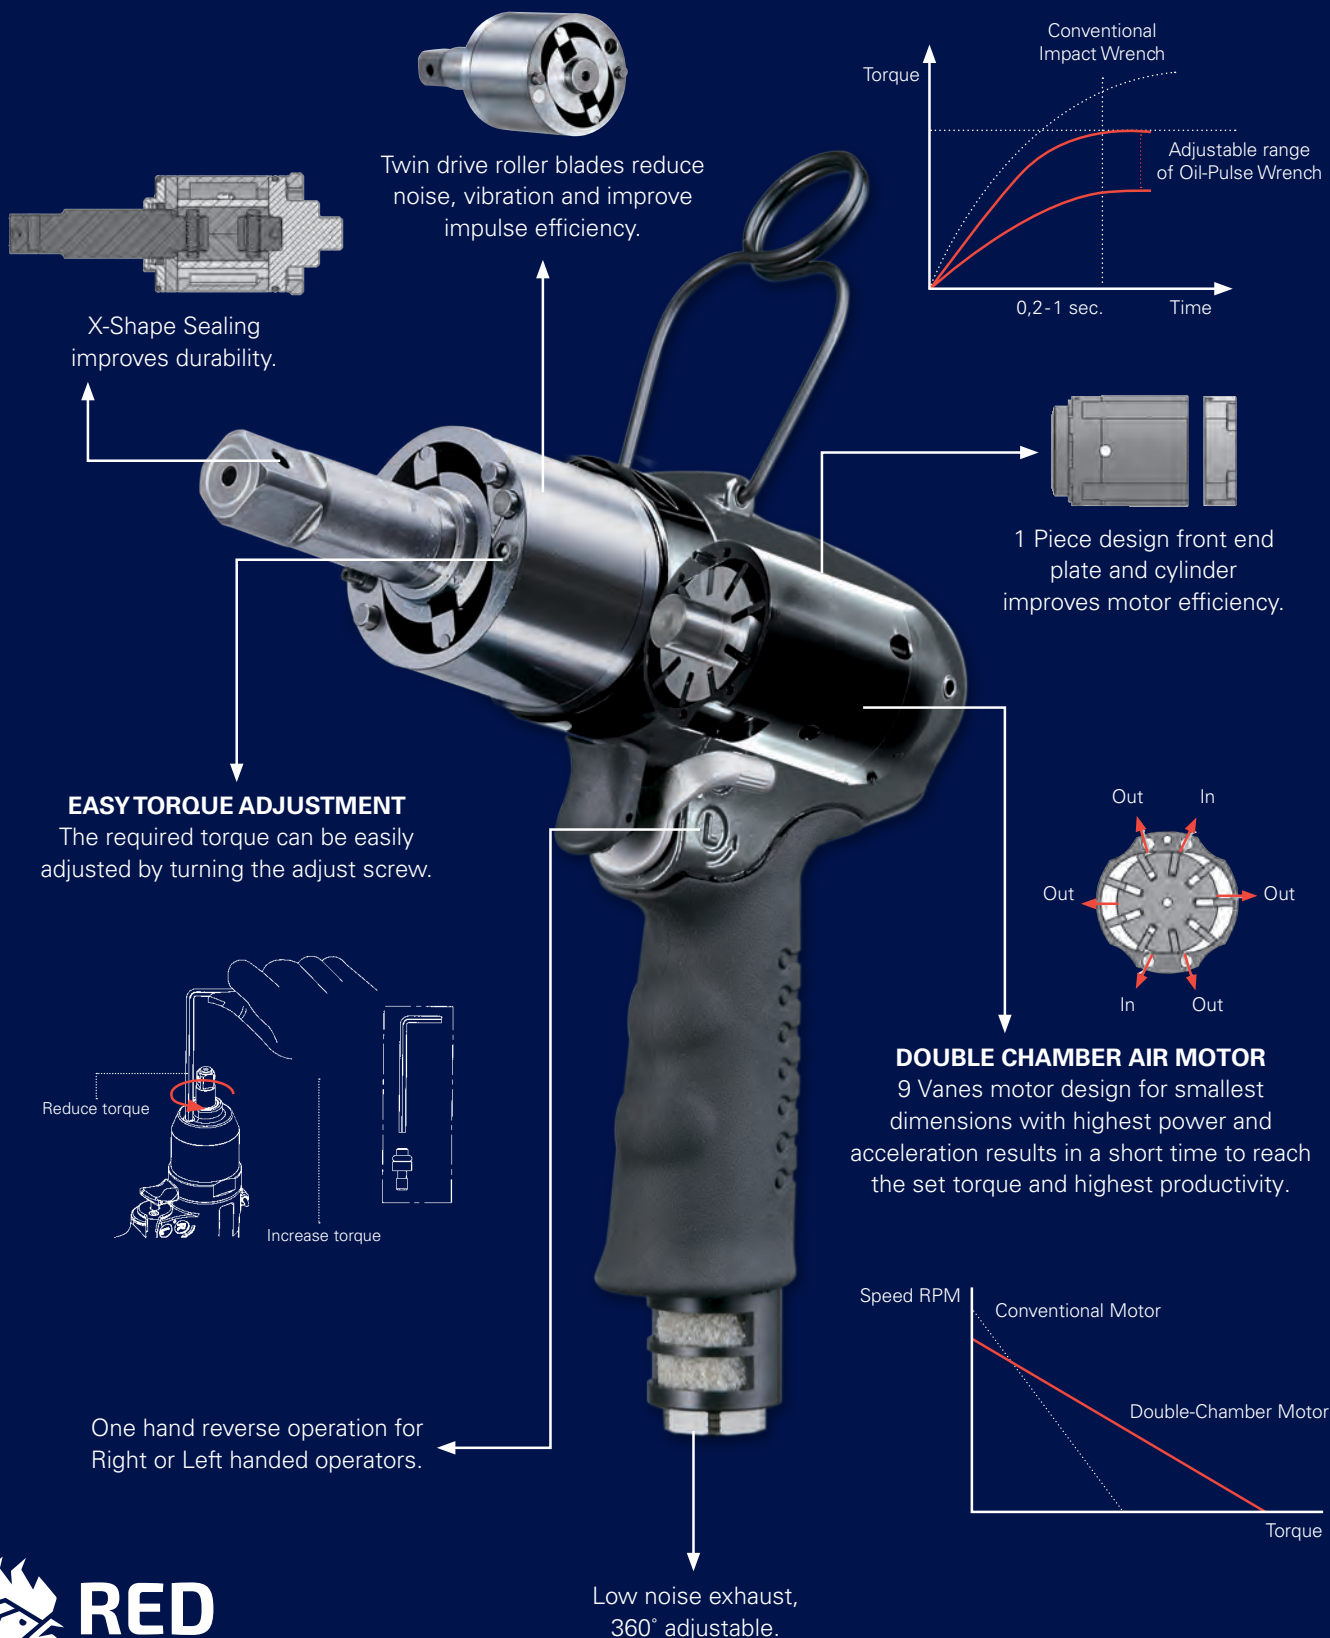

SHUT OFF IMPULSE WRENCHES



RRI-T Series: Pistol Models



1/4" Hex drive

Type	Square / Hex drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-30AT	1/4" Hex	6	4.600	6 - 12,5	3,7	0,89	PT 1/4"	6,5	78
RRI-40AT	1/4" Hex	6-8	4.600	10 - 18	3,7	0,92	PT 1/4"	6,5	78
RRI-50AT	1/4" Hex	8	7.200	16 - 26	5,3	0,92	PT 1/4"	6,5	80
RRI-60AT	1/4" Hex	8	6.200	20 - 30	6,2	1,0	PT 1/4"	8	82
RRI-70AT	1/4" Hex	10	7.200	32 - 47	7	1,35	PT 1/4"	8	82




3/8" - 1/2" - 3/4" Square drive

Type	Square / Hex drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-30T	3/8" Square	6	4.600	7 - 12,5	3,7	0,89	PT 1/4"	6,5	78
RRI-40T	3/8" Square	6-8	4.600	11 - 19	3,7	0,92	PT 1/4"	6,5	78
RRI-50T	3/8" Square	8	7.200	16 - 27	5,3	0,92	PT 1/4"	6,5	80
RRI-60T	3/8" Square	8-10	6.200	22 - 35	6,2	1	PT 1/4"	8	82
RRI-70T	3/8" Square	10	7.200	37 - 57	7	1,35	PT 1/4"	8	82
RRI-80T	3/8" Square	10-12	5.100	40 - 68	9,3	1,21	PT 1/4"	8	82
RRI-90T	1/2" Square	12	5.400	64 - 90	8,3	1,55	PT 1/4"	8	83
RRI-100T	1/2" Square	12-14	5.300	85 - 120	8,7	1,87	PT 1/4"	8	84
RRI-130T	1/2" Square	14-16	3.600	123 - 148	11,6	2,26	PT 1/4"	11	86
RRI-150T	3/4" Square	16	3.700	165 - 210	11,6	3,10	PT 1/4"	11	86
RRI-180T	3/4" Square	16-18	2.700	180 - 255	12,2	3,8	PT 1/4"	11	86
RRI-200T	3/4" Square	18-20	3.000	230 - 450	26	4,25	PT 3/8"	12,7	88

DIMENSIONS

Type	A mm	B mm	C mm	D mm	E mm
RRI-30AT	163	168	Ø46	21	Ø17,5
RRI-40AT	170	168	Ø46	27	Ø17,5
RRI-50AT	170	168	Ø46	27	Ø17,5
RRI-60AT	181	168	Ø46	27	Ø17,5
RRI-70AT	194	172	Ø53,5	28	Ø17,5
RRI-30T	163	168	Ø46	24	Ø12
RRI-40T	167	168	Ø46	24	Ø12
RRI-50T	167	168	Ø46	24	Ø12
RRI-60T	178	168	Ø46	24	Ø12
RRI-70T	194	172	Ø53,5	25	Ø12
RRI-80T	194	170	Ø53,5	25	Ø12
RRI-90T	200	192	Ø53,5	31	Ø16

Type	A mm	B mm	C mm	D mm	E mm
RRI-100T	209	195	Ø59	32	Ø16
RRI-130T	216	204	Ø64	31	Ø16
RRI-150T	239	215	Ø72	40	Ø25
RRI-180T	263	232	Ø78	41	Ø25
RRI-200T	250	239	Ø80	41	Ø25

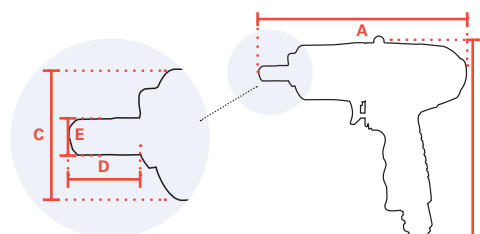

SHUT OFF IMPULSE WRENCHES



RRI-T Series: Straight Models



1/4" Hex drive

Type	Hex drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-30STA	1/4"	6	4.200	6 - 11,5	3,7	0,77	PT 1/4"	6,5	78
RRI-40STA	1/4"	6-8	4.200	10 - 17	3,7	0,8	PT 1/4"	6,5	78
RRI-50STA	1/4"	8	6.800	15 - 25	5,3	0,8	PT 1/4"	6,5	80
RRI-60STA	1/4"	8	6.000	20 - 30	6,2	0,86	PT 1/4"	8	80
RRI-70STA	1/4"	8-10	5.000	28 - 40	6,2	0,97	PT 1/4"	8	80




3/8" Square drive

Type	Square drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-30ST	3/8"	6	4.200	7 - 12,5	3,7	0,8	PT 1/4"	6,5	78
RRI-40ST	3/8"	6-8	4.200	11 - 19	3,7	0,8	PT 1/4"	6,5	78
RRI-50ST	3/8"	8	6.800	16 - 27	5,3	0,8	PT 1/4"	6,5	80
RRI-60ST	3/8"	8-10	6.000	22 - 35	6,2	0,86	PT 1/4"	8	80
RRI-70ST	3/8"	10	5.000	31 - 47	6,2	0,97	PT 1/4"	8	80
RRI-80ST	3/8"	10-12	6.100	40 - 68	9,3	1,15	PT 1/4"	8	82

DIMENSIONS

Type	A mm	B mm	C mm	D mm
RRI-30STA	219	Ø46	21	Ø17,5
RRI-40STA	224	Ø46	27	Ø17,5
RRI-50STA	224	Ø46	27	Ø17,5
RRI-60STA	225	Ø46	27	Ø17,5
RRI-70STA	244	Ø48	27	Ø17,5
RRI-30ST	219	Ø46	24	Ø12
RRI-40ST	221	Ø46	24	Ø12
RRI-50ST	221	Ø46	24	Ø12
RRI-60ST	231	Ø46	24	Ø12
RRI-70ST	244	Ø48	25	Ø12
RRI-80ST	244	Ø53,5	25	Ø12

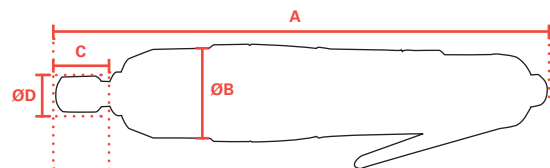

SHUT OFF IMPULSE WRENCHES



RRI-T Series: Angle Models



1/4" Hex drive

Type	Hex drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-50RTA	1/4"	6-8	4.300	9,5 - 16	4,8	1,2	PT 1/4"	6,5	80
RRI-60RTA	1/4"	8	4.700	15 - 22	6,2	1,3	PT 1/4"	8	80
RRI-70RTA	1/4"	8	4.500	20 - 29	6,2	1,4	PT 1/4"	8	80




3/8" Square drive

Type	Square drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-50RT	3/8"	6-8	4.300	10,5 - 17	4,8	1,2	PT 1/4"	6,5	80
RRI-60RT	3/8"	8	4.700	16 - 24	6,2	1,3	PT 1/4"	8	80
RRI-70RT	3/8"	8-10	4.500	22 - 31	6,2	1,4	PT 1/4"	8	80
RRI-70RGT	3/8"	10	2.000	32 - 45	6,2	1,6	PT 1/4"	8	82
RRI-70RHT	3/8"	10-12	2.200	46 - 60	6,2	1,6	PT 1/4"	8	82
RRI-80RHT	3/8"	10-12	2.800	50 - 70	9,3	1,7	PT 1/4"	8	82

DIMENSIONS

Type	A mm	B mm	C mm	D mm	E mm
RRI-50RTA	253	45	16	16	Ø11
RRI-60RTA	264	45	16	16	Ø11
RRI-70RTA	272	45	16	16	Ø11
RRI-50RT	253	45	14	16	Ø12
RRI-60RT	264	45	14	16	Ø12
RRI-70RT	272	45	14	16	Ø12
RRI-70RGT	281	47	14	21	Ø16
RRI-70RHT	281	47	21	21	Ø16
RRI-80RHT	281	47	21	21	Ø16

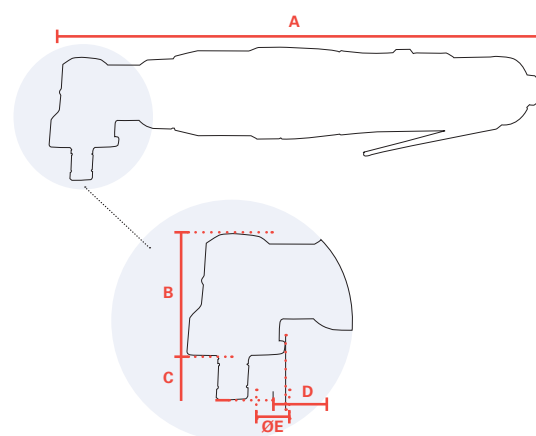

NON SHUT OFF IMPULSE WRENCHES



RRI Series: Pistol Models

1/4" Hex drive



Type	Hex drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-30A	1/4"	6	4.600	6 - 12,5	3,7	0,87	PT 1/4"	6,5	78
RRI-40AX	1/4"	6-8	4.600	10 - 18	3,7	0,74	PT 1/4"	6,5	78
RRI-50AX	1/4"	8	7.200	16 - 26	5,3	0,9	PT 1/4"	6,5	80
RRI-60AX	1/4"	8	6.200	20 - 30	6,2	0,81	PT 1/4"	8	82
RRI-70A	1/4"	10	7.200	32 - 47	7	1,33	PT 1/4"	8	82




3/8" - 1/2" - 3/4" Square drive

Type	Square drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-30	3/8"	6	4.600	7 - 12,5	3,7	0,87	PT 1/4"	6,5	78
RRI-40X	3/8"	6-8	4.600	11 - 19	3,7	0,74	PT 1/4"	6,5	78
RRI-50X	3/8"	8	7.200	16 - 27	5,3	0,74	PT 1/4"	6,5	80
RRI-60X	3/8"	8-10	6.200	22 - 35	6,2	0,81	PT 1/4"	8	82
RRI-70	3/8"	10	7.200	37 - 57	7	1,33	PT 1/4"	8	82
RRI-80	3/8"	10-12	5.100	40 - 70	9,3	1,19	PT 1/4"	8	82
RRI-90	1/2"	12	5.400	64 - 90	8,3	1,53	PT 1/4"	8	83
RRI-100	1/2"	12-14	5.300	85 - 120	8,7	1,85	PT 1/4"	8	84
RRI-130	1/2"	14-16	3.600	123 - 148	11,6	2,22	PT 1/4"	11	86
RRI-150	3/4"	16	3.700	165 - 210	11,6	3,05	PT 1/4"	11	86
RRI-180	3/4"	16-18	2.700	180 - 255	12,2	3,8	PT 1/4"	11	86
RRI-200	3/4"	18-20	3.000	220 - 390	26	4,25	PT 3/8"	13	88

DIMENSIONS

Type	A mm	B mm	C mm	D mm	E mm
RRI-30/30A	167	168	Ø46	24	Ø12
RRI-40X/40AX	147	168	Ø46	24	Ø12
RRI-50X/50A	147	168	Ø46	24	Ø12
RRI-60X/60AX	158	168	Ø46	24	Ø12
RRI-70/70A	194	192	Ø53,5	25	Ø12
RRI-80	194	170	Ø53,5	25	Ø12
RRI-90	200	192	Ø53,5	31	Ø16
RRI-100	209	195	Ø59	32	Ø16
RRI-130	216	204	Ø64	31	Ø16
RRI-150	238	215	Ø72	40	Ø25
RRI-180	263	232	Ø78	41	Ø25
RRI-200	250	239	Ø80	41	Ø25

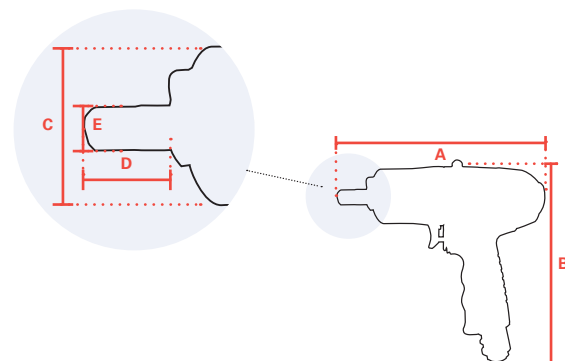

NON SHUT OFF IMPULSE WRENCHES



RRI Series: Straight Models



1/4" Hex drive

Type	Hex drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-30SA	1/4"	6	4.200	6 - 11,5	3,7	0,77	PT 1/4"	6,5	78
RRI-40SA	1/4"	6-8	4.200	10 - 17	3,7	0,8	PT 1/4"	6,5	78
RRI-50SA	1/4"	8	6.800	15 - 25	5,3	0,8	PT 1/4"	6,5	80
RRI-60SA	1/4"	8	6.000	20 - 30	6,2	0,86	PT 1/4"	8	80
RRI-70SA	1/4"	8-10	5.000	28 - 40	6,2	0,97	PT 1/4"	8	80



1/4" Square drive

Type	Square drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-30S	3/8"	6	4.200	7 - 12,5	3,7	0,8	PT 1/4"	6,5	78
RRI-40S	3/8"	6-8	4.200	11 - 19	3,7	0,8	PT 1/4"	6,5	78
RRI-50S	3/8"	8	6.800	16 - 27	5,3	0,8	PT 1/4"	6,5	80
RRI-60S	3/8"	8-10	6.000	22 - 35	6,2	0,86	PT 1/4"	8	80
RRI-70S	3/8"	10	5.000	31 - 47	6,2	0,97	PT 1/4"	8	80




CUSTOM MADE PRODUCTS

See page 41 for impulse wrenches tailored to your specific needs.

DIMENSIONS

Type	A mm	B mm	C mm	D mm
RRI-30SA	219	Ø46	21	Ø17,5
RRI-40SA	224	Ø46	27	Ø17,5
RRI-50SA	224	Ø46	27	Ø17,5
RRI-60SA	235	Ø46	27	Ø17,5
RRI-70SA	244	Ø48	27	Ø17,5
RRI-30S	219	Ø46	24	Ø12
RRI-40S	221	Ø46	24	Ø12
RRI-50S	221	Ø46	24	Ø12
RRI-60S	221	Ø46	24	Ø12
RRI-70S	244	Ø48	25	Ø12

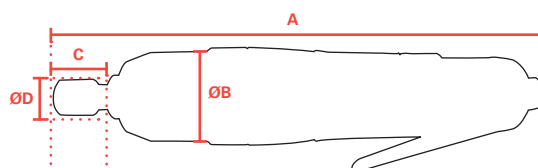

NON SHUT OFF IMPULSE WRENCHES



RRI Series: Angle Models

1/4" Hex drive



Type	Hex drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-50RA	1/4"	6-8	4.300	9,5 - 16	4,8	1,2	PT 1/4"	6,5	80
RRI-60RA	1/4"	8	4.700	15 - 22	6,2	1,3	PT 1/4"	8	80
RRI-70RA	1/4"	8	4.500	20 - 29	6,2	1,4	PT 1/4"	8	80

1/2" - 3/8" Square drive



Type	Square drive	Bolt capacity mm	RPM	Torque range Nm	Air consumption l/sec	Weight kg	Inlet-thread	Hose diameter mm	Noise-level dB(A)
RRI-50R	3/8"	6-8	4.300	10,5 - 17	4,8	1,2	PT 1/4"	6,5	80
RRI-60R	3/8"	8	4.700	16 - 24	6,2	1,3	PT 1/4"	8	80
RRI-70R	3/8"	8-10	4.500	22 - 31	6,2	1,4	PT 1/4"	8	80
RRI-70RG	3/8"	10	2.000	34 - 50	6,2	1,6	PT 1/4"	8	82
RRI-70RH	1/2"	10 - 12	2.200	46 - 60	6,2	1,6	PT 1/4"	8	82


CUSTOM MADE PRODUCTS

See page 41 for impulse wrenches tailored to your specific needs.



DIMENSIONS

Type	A mm	B mm	C mm	D mm	E mm
RRI-50RA	253	45	16	16	Ø11
RRI-60RA	264	45	16	16	Ø11
RRI-70RA	272	45	16	16	Ø11
RRI-50R	253	45	14	16	Ø12
RRI-60R	264	45	14	16	Ø12
RRI-70R	272	45	14	16	Ø12
RRI-70RG	281	47	14	21	Ø12
RRI-70RH	281	47	21	21	Ø16

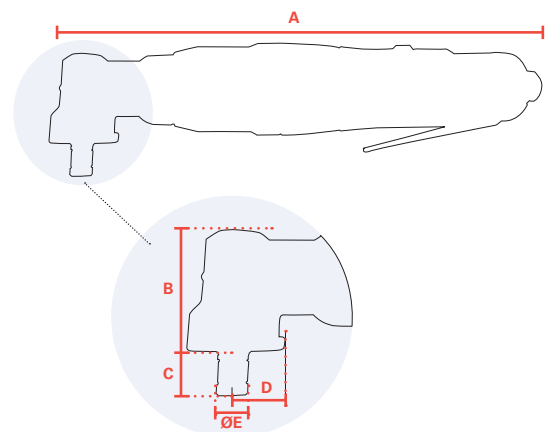


IMPULSE WRENCHES

Custom Made Products



For narrow space applications we offer geared offset tools with a torque range of 6-300 Nm.

- Installation in places where access is restricted.
- Flat output with non shut-off impulse wrench

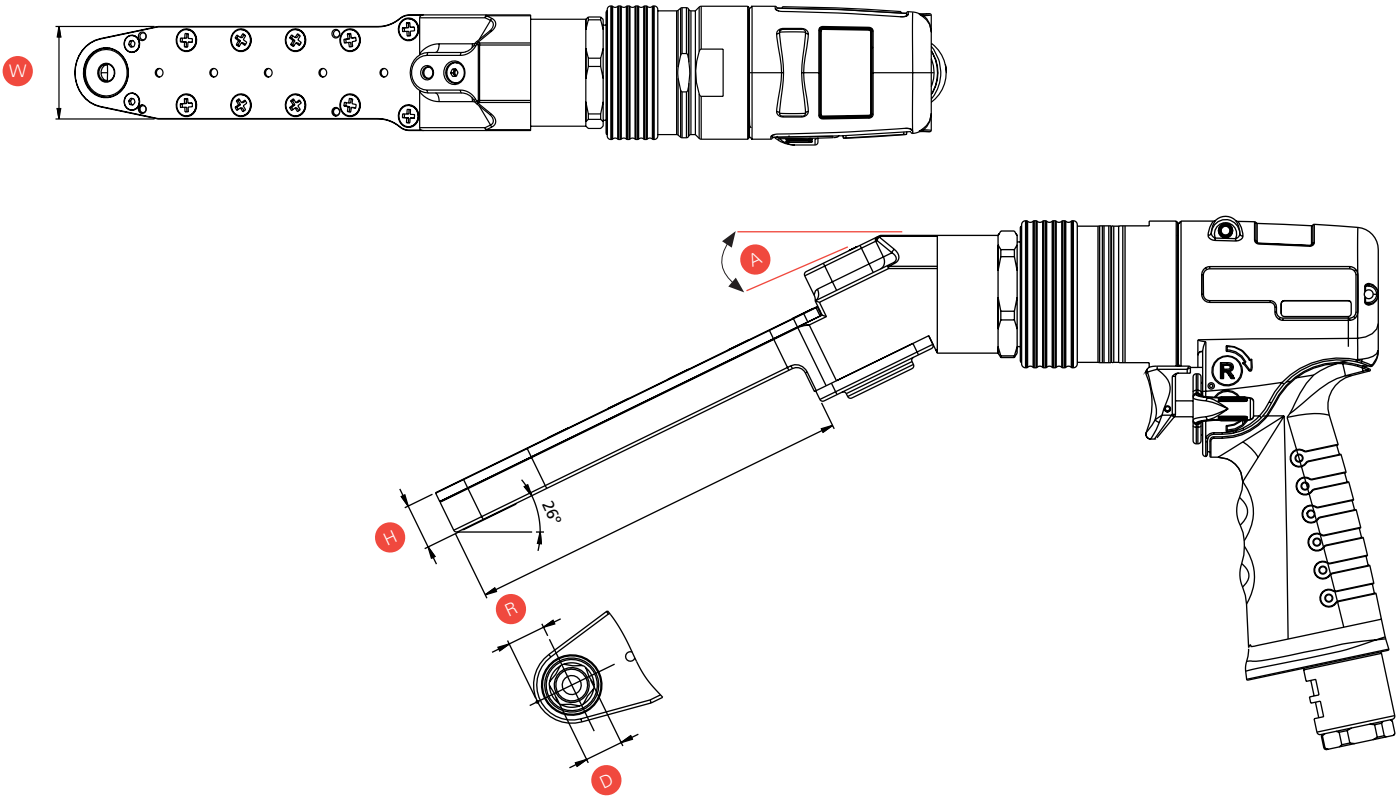


Please fill this form and contact us with your request for a tailor-made solution

Torque Nm	Pistol model Straight model Angle model	W*	A	D* Hexagon dimension	H*	L*	R*
	☐ Pistol ☐ Straight ☐ Angle	 mm	☐ 0° ☐ 26° ☐ 90°	Hexagon mm	 mm	 mm	 mm

* Maximum dimensions

EXAMPLES

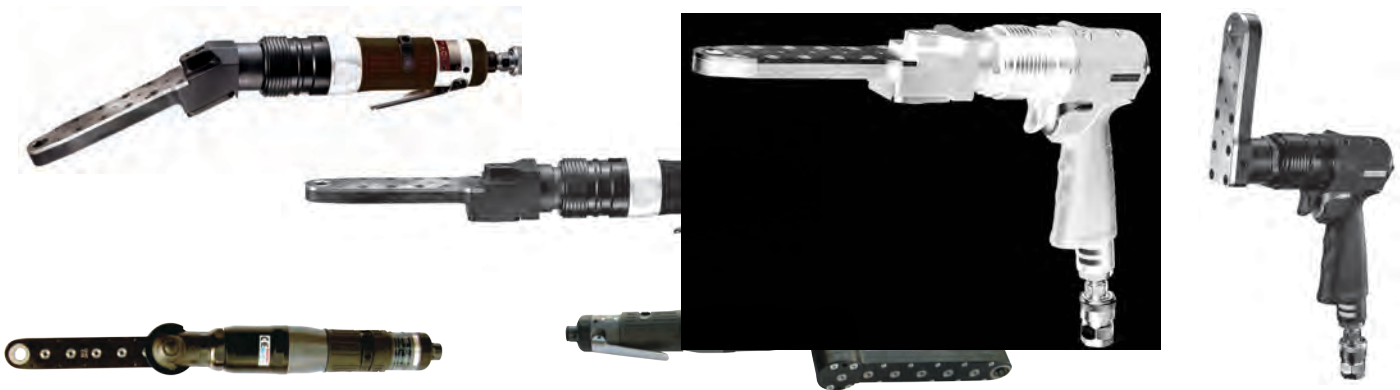


CORDLESS IMPULSE WRENCHES



Cordless
Impulse
Wrenches

Main Features

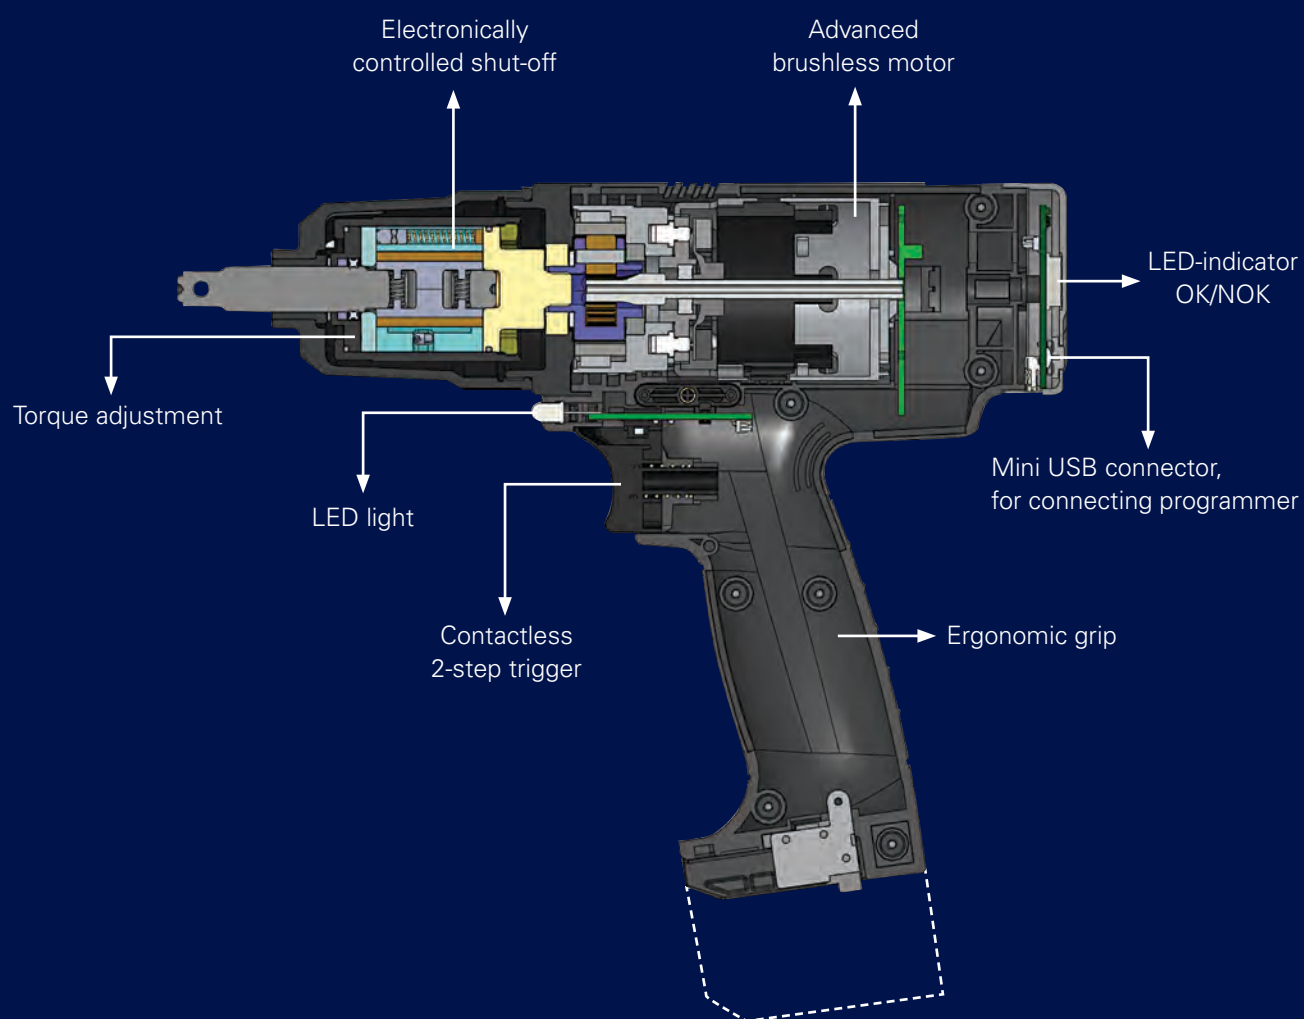

SHUT OFF IMPULSE WRENCHES



Cordless
Impulse
Wrenches

RRI-BIM Series: Cordless


LED INDICATOR OK/NOK

BLOCKING ADJUSTMENT OF THE SHUT-OFF

- Remove battery
- Mount battery and simultaneously push trigger and L/R
- Switch until sound signal (5 seconds), then release trigger and L/R Switch.
- Deblocking = same

BLOCKING UN-TIGHTENING

- Remove battery
- Mount battery and simultaneously push trigger and L/R
- Switch until sound signal (5 seconds)
- Deblocking = same

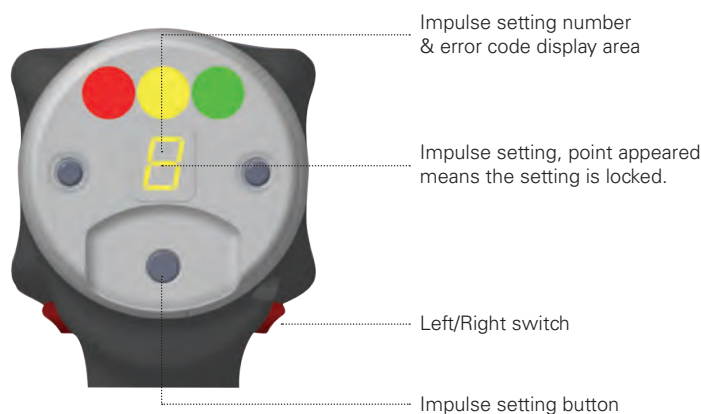

FLASHING YELLOW
+ FLASHING GREEN
reverse operation



GREEN
tightening OK



RED
tightening NOK



FLASHING YELLOW
low battery warning




YELLOW
change battery




ALUMINIUM COVER
FOR EXTRA
PROTECTION
See accessoires
on page 30.

MECHANICAL SHUT-OFF OR ELECTRONIC CONTROLLED SHUT-OFF IMPULSE WRENCHES

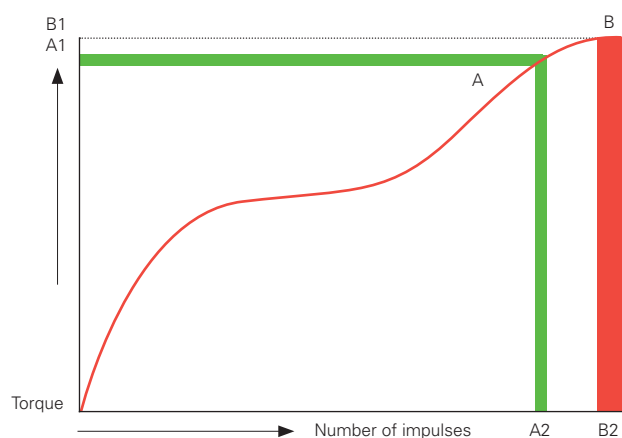

A: shut-off area of mechanical shut-off impulse wrenches
B: shut-off area of electronic controlLED shut-off impulse wrenches. Optimum tension with lower relaxation.

JOINT QUALITY

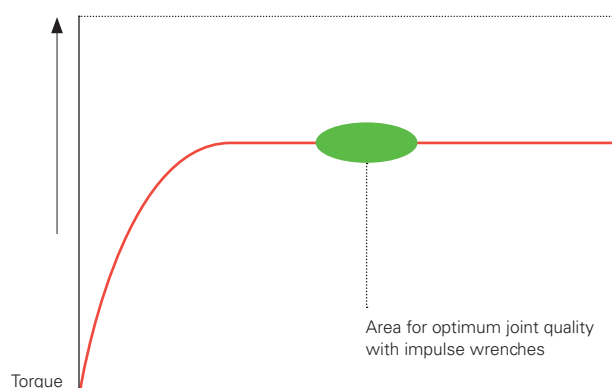

For hard joints: numerical setting: (2-3-4)
For middle soft joints: numerical setting: (4-5-6)
For soft joints: numerical setting: (6-7-8-9)

SHUT OFF IMPULSE WRENCHES



Cordless
Impulse
Wrenches

RRI-BIM Series: Cordless

These cordless shut-off impulse wrenches combine high tightening speeds with high accuracy and no reaction force. The no tightening functionality when the battery charge is low improves the process safety. Very well suited for areas where cables and hoses impede handling flexibility of tools, such as interiors of cars, coaches and trains.

CHARACTERISTICS


- Brushless motor
- 18 Volt Lithium-Ion battery (choice for 2,0 Ah or 4,0 Ah capacity)
- LED status indicates: Reverse, OK, NOK, Battery low
- Torque adjustable
- Fine-tuning on hardness of the joint, electronically
- Non-contact trigger with 2 steps
- Run-down speed up to 4.500 RPM

Battery, charger, programmer and power cord have to be ordered separately. See page 52.

Type	Square/ Hex drive	Torque Nm	RPM	Weight kg	Dimensions A mm	B mm
RRI-BIM15AT	1/4" Hex	7-15	4.500	1,16	29	227
RRI-BIM15T	3/8" Square	8-15	4.500	1,16	29	224
RRI-BIM25AT	1/4" Hex	14-23	4.500	1,18	29	237
RRI-BIM25T	3/8" Square	15-25	4.500	1,18	29	234
RRI-BIM35T	3/8" Square	22-35	3.500	1,36	29	234
RRI-BIM45T	3/8" Square	32-45	3.500	1,42	29	244
RRI-BIM65T	1/2" Square	45-65	3.200	1,90	29	244

EPR
Efficient Power Regulation

ATT
Advanced Torque Technology



CHARACTERISTICS



ACCESSORIES



Rubber protection
cover



Aluminium cover



Service Kit

Rubber protection cover	Order number
RRI-BIM15T (AT)	C16PW-15
RRI-BIM25T (AT)	C16PW-25
RRI-BIM35T	C16PW-25
RRI-BIM45T	C16PW-45
RRI-BIM65T	C16PW65
Aluminium cover	Order number
RRI-BIM serie	B10PW15
Service Kits:	Order number
RRI-BIM15T (AT)	I40RK
RRI-BIM25T (AT)	I70RK
RRI-BIM35T	I70RK
RRI-BIM45T	I80RK-YO
RRI-BIM65T	32399-001



BOSCH

RED ROOSTER

RAMI YOKOTA BV
DE RUYTERKADE 120, NL-1011 AB AMSTERDAM

RED ROOSTER
LEADING IN AIR POWER TOOL SOLUTIONS

RED ROOSTER
18V 2.0Ah Li-ion

POWERED BY



BOSCH

PNEUMATIC SCREWDRIVERS



Main features

SHUT-OFF CLUTCH

Construction and geometry of the shut-off clutch mechanism designed for:

- High accuracy ($Cmk > 2$ at $\pm 10\%$)
- Minimised reaction forces

CONNECTIVITY

Possibility to connect air on top.

TRIGGER

High strength of the trigger.

HOUSING


Composite housing, designed for best ergonomics and light weight.

SILENCER

Increased surface area of silencer material for very low noise level.

EXHAUST AIR

Adjustable direction of exhaust air

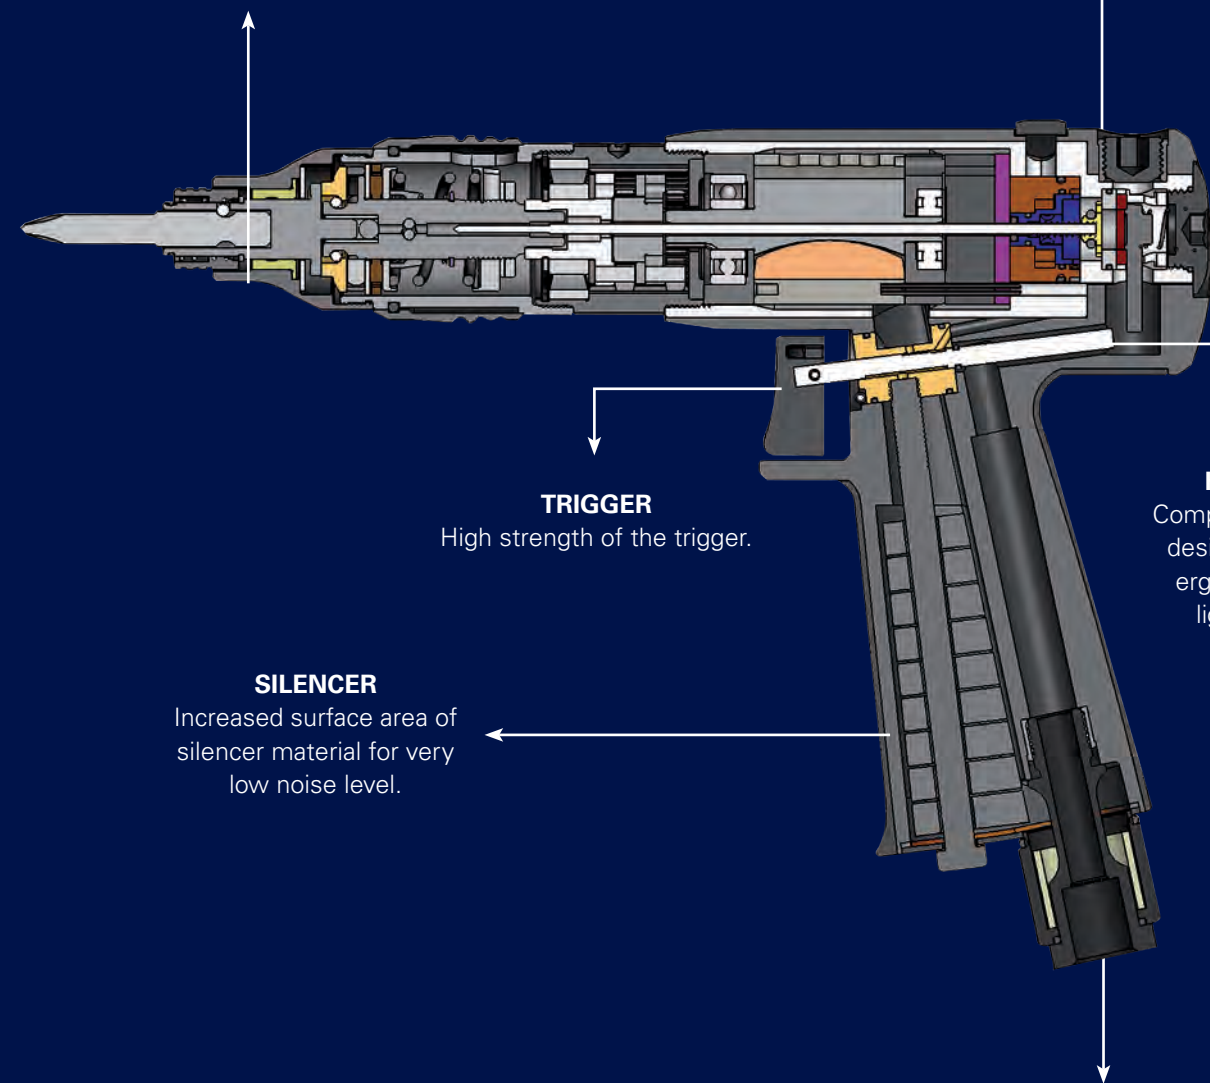

SHUT OFF SCREWDRIVERS



RRI-S Series: Pistol Models

These RED ROOSTER shut-off screwdrivers have a large torque-range, are highly accurate, have a low vibration and noise level and a very ergonomic design. The special design of the clutch combines low reaction forces with a high repeatability of the torque. This air tool is designed for the assembly industry, where threaded fasteners are used. The wide range of different speeds always allows the best choice for the application. Low speed for plastics and hose clamps, high speeds for machined screws.



CHARACTERISTICS


- Composite housing
- Reversible
- Rear-exhaust, silenced
- Ergonomic grip, trigger start
- Easily adjustable
- Pistol model air on top
- Large torque range
- Delivery includes hanger
- Side grip delivered with size 3 tools

Type	Brand	Hex drive	Bolt capacity mm	RPM	Torque Nm	Air-cons. l/s	Weight kg	Inlet-thread	Hose-diameter mm	Vibration m/s ²	Noise level dB(A)
RRI-SP10502	RRI	1/4" Hex	4	550	1,0 - 2,5	8	0,77	1/4"	6,5	<2,5	68
RRI-SP11602	RRI	1/4" Hex	4	1.600	0,4 - 1,8	8	0,77	1/4"	6,5	<2,5	68
RRI-SP10902	RRI	1/4" Hex	4	900	0,4 - 2,2	8	0,77	1/4"	6,5	<2,5	68
RRI-SP21704	RRI	1/4" Hex	4	1.700	1 - 3,5	10	0,98	1/4"	6,5	<2,5	72
RRI-SP21104	RRI	1/4" Hex	4	1.100	1,5 - 4	10	0,98	1/4"	6,5	<2,5	72
RRI-SP20705	RRI	1/4" Hex	4	700	1,5 - 4,5	10	0,98	1/4"	6,5	<2,5	72
RRI-SP31706	RRI	1/4" Hex	5	1.700	3,5 - 5,2	12	1,1	1/4"	6,5	<2,5	72
RRI-SP31108	RRI	1/4" Hex	5	1.100	3,5 - 6,3	12	1,1	1/4"	6,5	<2,5	72
RRI-SP30710	RRI	1/4" Hex	6	700	3,5 - 8,2	12	1,1	1/4"	6,5	<2,5	72
RRI-SP30511	RRI	1/4" Hex	6	550	3,5 - 10	12	1,1	1/4"	6,5	<2,5	72

* The indicated torque levels are measured on hard joints.

DIMENSIONS

Type	A mm	B mm	C mm	Ø D mm	Size
RRI-SP10502	198	16	157	31	1
RRI-SP11602	198	16	157	31	1
RRI-SP10902	198	16	157	31	1
RRI-SP21704	209	18	157	34,5	2
RRI-SP21104	209	18	157	34,5	2
RRI-SP20705	209	18	157	34,5	2
RRI-SP31706	238	18	156	34,5	3
RRI-SP31108	238	18	157	34,5	3
RRI-SP30710	238	18	157	34,5	3
RRI-SP30511	238	18	157	34,5	3

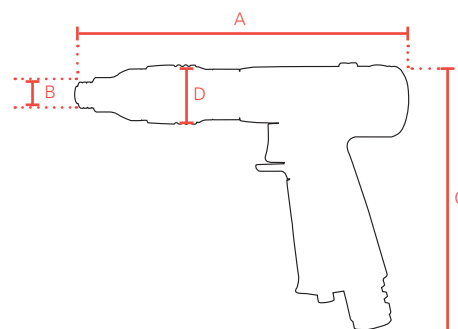

ACCESSORIES



Side grip for Size 2 & 3 tools
Order number: 766-027*
* At size 3 supplied as standard



Torque adjustment key
Order number: 00-4507*
* Supplied as standard



Tool holder
Order number: 61022-TH001

SHUT OFF SCREWDRIVERS



RRI-S Series: Straight Models

CHARACTERISTICS

- New straight design with soft grip
- Reversible
- Rear-exhaust, silenced
- Ergonomic grip, lever start or push start
- Easily adjustable
- Delivery includes hanger
- Large torque range
- Side grip delivered with size 3 tools



Push start type



Lever start type

SHUT-OFF SCREWDRIVERS PUSH START TYPE

Type	Brand	Hex drive	Bolt capacity mm	RPM	Torque Nm	Air-cons. l/s	Weight kg	Inlet-thread	Hose-diameter mm	Vibration m/s ²	Noise level dB(A)
RRI-SD11602	RRI	1/4" Hex	4	1.600	0,4 - 1,8	8	0,54	1/4"	6,5	<2,5	68
RRI-SD10902	RRI	1/4" Hex	4	900	0,4 - 2,2	8	0,54	1/4"	6,5	<2,5	68
RRI-SD21704	RRI	1/4" Hex	4	1.700	1 - 3,5	10	0,77	1/4"	6,5	<2,5	72
RRI-SD21104	RRI	1/4" Hex	4	1.100	1,5 - 4	10	0,77	1/4"	6,5	<2,5	72
RRI-SD20705	RRI	1/4" Hex	4	700	1,5 - 4,5	10	0,77	1/4"	6,5	<2,5	72
RRI-SD31706	RRI	1/4" Hex	5	1.700	3,5 - 5,2	12	0,89	1/4"	6,5	<2,5	72
RRI-SD31108	RRI	1/4" Hex	5	1.100	3,5 - 6,3	12	0,89	1/4"	6,5	<2,5	72
RRI-SD30710	RRI	1/4" Hex	6	700	3,5 - 8,2	12	0,89	1/4"	6,5	<2,5	72
RRI-SD30511	RRI	1/4" Hex	6	550	3,5 - 10	12	0,89	1/4"	6,5	<2,5	72

SHUT-OFF SCREWDRIVERS LEVER START TYPE


Type	Brand	Hex drive	Bolt capacity mm	RPM	Torque Nm	Air-cons. l/s	Weight kg	Inlet-thread	Hose-diameter mm	Vibration m/s ²	Noise level dB(A)
RRI-SL11602	RRI	1/4" Hex	4	1.600	0,4 - 1,8	8	0,59	1/4"	6,5	<2,5	68
RRI-SL10902	RRI	1/4" Hex	4	900	0,4 - 2,2	8	0,59	1/4"	6,5	<2,5	68
RRI-SL21704	RRI	1/4" Hex	4	1.700	1 - 3,5	10	0,84	1/4"	6,5	<2,5	72
RRI-SL21104	RRI	1/4" Hex	4	1.100	1,5 - 4	10	0,84	1/4"	6,5	<2,5	72
RRI-SL20705	RRI	1/4" Hex	4	700	1,5 - 4,5	10	0,84	1/4"	6,5	<2,5	72
RRI-SL31706	RRI	1/4" Hex	5	1.700	3,5 - 5,2	12	0,93	1/4"	6,5	<2,5	72
RRI-SL31108	RRI	1/4" Hex	5	1.100	3,5 - 6,3	12	0,93	1/4"	6,5	<2,5	72
RRI-SL30710	RRI	1/4" Hex	6	700	3,5 - 8,2	12	0,93	1/4"	6,5	<2,5	72
RRI-SL30511	RRI	1/4" Hex	6	550	3,5 - 10	12	0,93	1/4"	6,5	<2,5	72

* The indicated torque levels are measured on hard joints.

DIMENSIONS

Type	A mm	B mm	Ø D mm	Size
RRI-SD11602	228	16	31	1
RRI-SD10902	228	16	31	1
RRI-SD21704	244	18	34,5	2
RRI-SD21104	244	18	34,5	2
RRI-SD20705	244	18	34,5	2
RRI-SD31706	276	18	34,5	3
RRI-SD31108	276	18	34,5	3
RRI-SD30710	276	18	34,5	3
RRI-SD30511	276	18	34,5	3

Type	A mm	B mm	Ø D mm	Size
RRI-SL11602	244	16	31	1
RRI-SL10902	244	16	31	1
RRI-SL21704	263	18	34,5	2
RRI-SL21104	263	18	34,5	2
RRI-SL20705	263	18	34,5	2
RRI-SL31706	263	18	34,5	3
RRI-SL31108	309	18	34,5	3
RRI-SL30710	309	18	34,5	3
RRI-SL30511	309	18	34,5	3

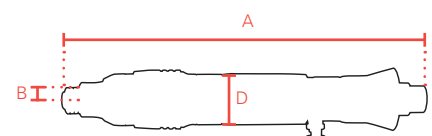

For torque adjustment key and side grip for screwdrivers with size 3 see page 47.

SHUT OFF SCREWDRIVERS



RRI-S Series: Angle Models

CHARACTERISTICS


- New angled body-design with soft grip
- Reversible
- Rear-exhaust, silenced
- Ergonomic grip, lever start
- Easily adjustable
- Delivery includes hanger
- Large torque range



Type	Brand	Square/ Hex drive	Bolt capacity mm	RPM	Torque Nm	Air- cons. l/s	Weight kg	Inlet- thread	Hose- diameter mm	Vibration m/s ²	Noise level dB(A)
RRI-SA11602	RRI	1/4" Hex	4	1.600	0,4 - 1,8	8	0,82	1/4"	6,5	<2,5	68
RRI-SA10902	RRI	1/4" Hex	4	900	0,4 - 2,2	8	0,82	1/4"	6,5	<2,5	68
RRI-SA21704	RRI	1/4" Hex	4	1.700	1 - 3,5	10	1,02	1/4"	6,5	<2,5	72
RRI-SA21104	RRI	1/4" Hex	4	1.100	1,5 - 4	10	1,02	1/4"	6,5	<2,5	72
RRI-SA20705	RRI	1/4" Hex	4	700	1,5 - 4,5	10	1,02	1/4"	6,5	<2,5	72
RRI-SA31108	RRI	1/4" Hex	5	1.100	3,5 - 6,3	12	1,36	1/4"	6,5	<2,5	72
RRI-SA30710	RRI	1/4" Hex	6	700	3,5 - 7,2	12	1,36	1/4"	6,5	<2,5	72
RRI-SA30511	RRI	1/4" Hex	6	550	3,5 - 10	12	1,36	1/4"	6,5	<2,5	72
RRI-SA31108W	RRI	3/8" Square	5	1.100	3,5 - 6,3	12	1,36	1/4"	6,5	<2,5	72
RRI-SA30710W	RRI	3/8" Square	6	700	3,5 - 8,2	12	1,36	1/4"	6,5	<2,5	72
RRI-SA30511W	RRI	3/8" Square	6	550	3,5 - 10	12	1,36	1/4"	6,5	<2,5	72

DIMENSIONS

Type	A mm	B mm	C mm	E mm
RRI-SA11602	294	29	16,1	12
RRI-SA10902	294	29	16,1	12
RRI-SA21704	314	29	16,1	12
RRI-SA21104	314	29	16,1	12
RRI-SA20705	314	30,5	15,8	13,5
RRI-SA31108	350	30,5	15,8	13,5
RRI-SA30710	350	30,5	15,8	13,5
RRI-SA30511	350	30,5	15,8	13,5
RRI-SA31108W	350	30,5	15,8	13,5
RRI-SA30710W	350	30,5	15,8	13,5
RRI-SA30511W	350	30,5	15,8	13,5

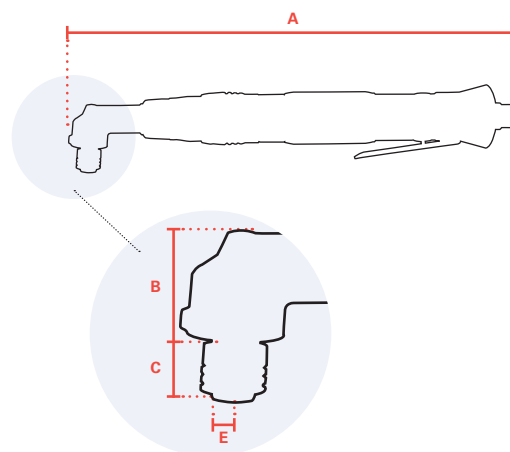

ACCESSORIES




Torque adjustment tool
Order number: 00-4507*
* Supplied as standard

CORDLESS SCREWDRIVERS



Cordless
Screwdriver

Main features

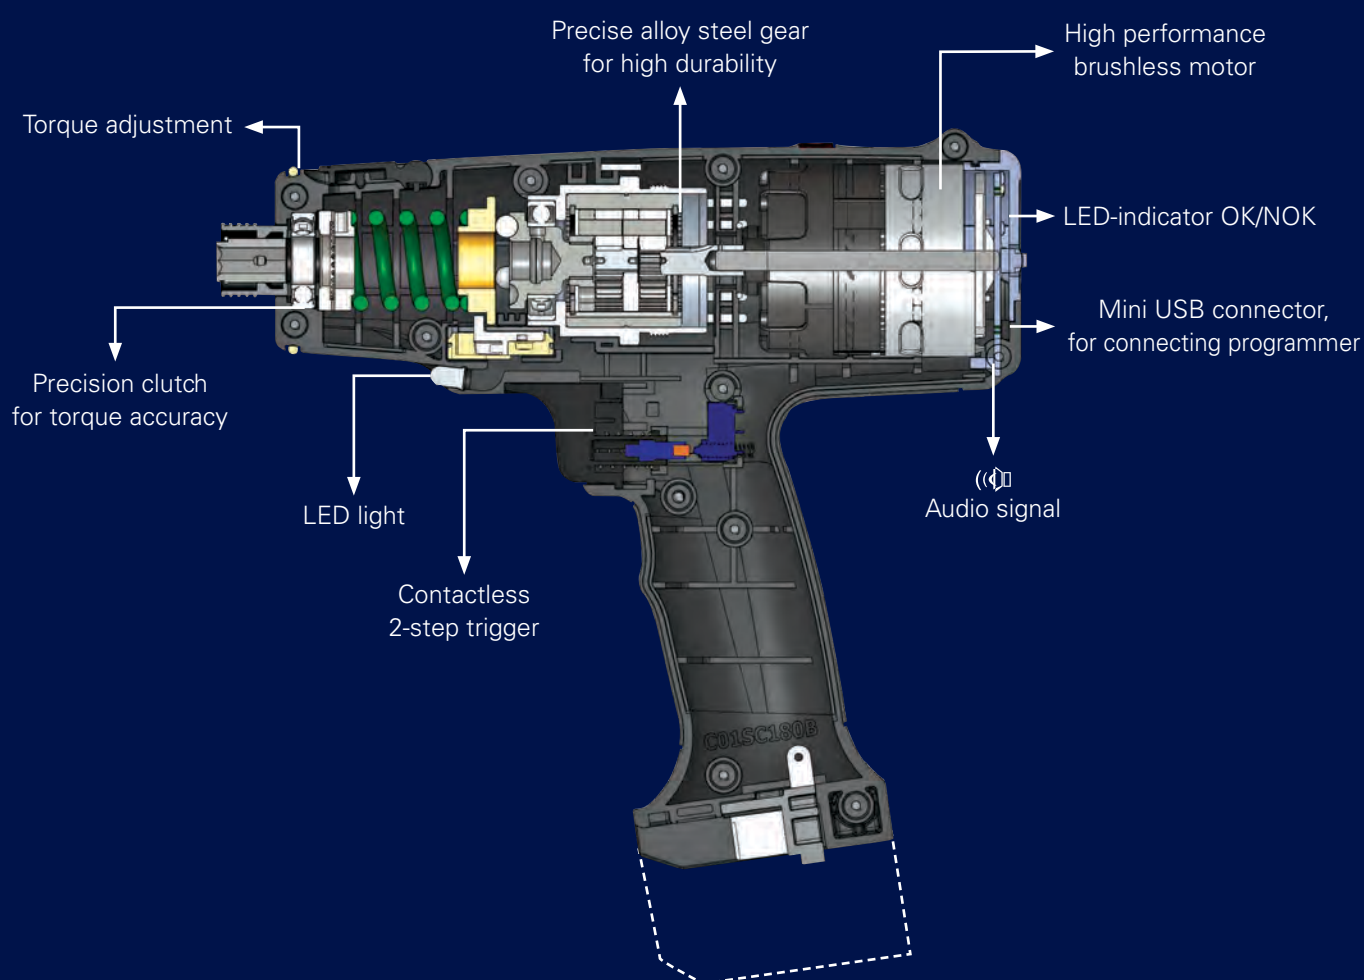

SHUT OFF SCREWDRIVERS



Cordless
Screwdriver

RRI-BS Series: Cordless

The Red Rooster cordless shut-off screwdriver is very well suited for assembly applications with a need for good torque accuracy. Especially in areas where cables and hoses impede handling flexibility, such as interiors of cars, coaches and trains.

CHARACTERISTICS

- Torque accuracy: meet ISO 5393 Cmk>2 at $\pm 10\%$ tolerance.
- Precision clutch with low reaction forces.
- Trigger repeat protection avoids "double hits".
- Brushless motor: ensures low maintenance.
- Highly durable gear: ensures low maintenance.
- Precision shut-off clutch: ensures quality in tightening.
- Ergonomic rubber grip: ensures operator performance.
- Delivery includes hanger bracket.


Choice of four rings with different colours to distinguish the torque.



Type	Volt V	Drive size	Screw size mm	Torque range Nm	RPM	Weight (w/o battery) kg	Dimensions A mm	B mm
RRI-BS3	18 V	1/4" Hex	M3 - M4	0,8-3	500-1.550	0,95	203	238
RRI-BS6	18 V	1/4" Hex	M3 - M5	1-6	300-900	0,95	203	238
RRI-BS9	18 V	1/4" Hex	M3 - M5	1,5-9	300-700	0,95	203	238
RRI-BS12	18 V	1/4" Hex	M4 - M6	2-12	250-550	0,95	203	238

Battery, charger, programmer and power cord have to be ordered separately, see page 52.

EPR IBT
Efficient Power Regulation Intelligent Bolting Technology



DIMENSIONS

PROGRAMMER



Mini USB



Programmer



LED light

FEATURES


- One programmer fits all RRI-BS series tools
- Easy to set the tool speed:
 - high speed for metallic assemblies
 - medium speed for plastic assemblies
 - low speed for special assemblies
- Total used time memory function
- Total count memory function
- Operation count memory function
- Tool identification number
- A green light tells the operator that the preset torque is reached and the tightening is OK.
- A red light and one long "beep" sound tells the operator that the preset torque is not reached, tightening must be performed again.
- A flashing yellow light and five short "beep" sounds give an early warning when it is time to recharge the battery.
- A yellow light and one long "beep" sound means the battery is empty and the tool can't operate. A fully charged battery should be placed to continue working.

SHUT OFF SCREWDRIVERS



RRI-BS Series: Cordless


TORQUE ADJUSTMENT

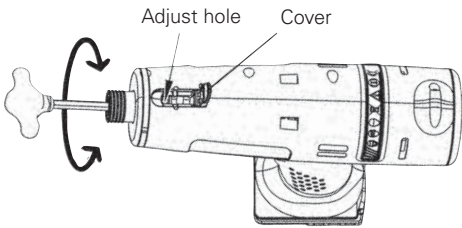

1. Lift the torque adjustment over. Take the torque adjust tool and insert it to the quick change holder and turn until the adjust hole shows up.

NOTE

To avoid danger during the adjustment process, the battery pack must be removed before adjusting the torque.

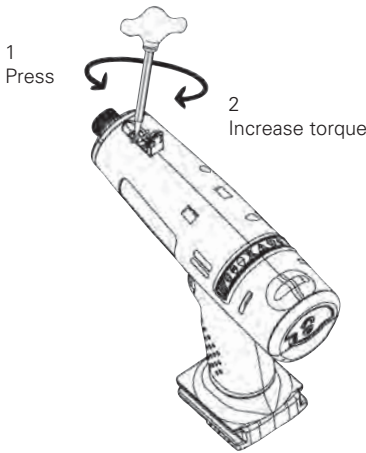

2. Use the torque adjust tool to turn clockwise to increase torque and turn counter clockwise to decrease torque.

APPLICATIONS

- Assembly applications where torque accuracy is required.
- Areas where pneumatic or electric tools are impractical to use due to hoses/cables.
- Especially used on car interior assembly.
- Attaching components to the dashboard.
- Hose clips on turbo chargers and air intakes, heating and climate systems and coolant circuits.
- Assembly of components in switch cabinets.

ACCESSORIES



Torque adjustment tool
Order number 00-4507*
* Supplied as standard



Rubber protection cover
Order number C16SC180B

LI-ION BATTERY, CHARGER, PROGRAMMER, POWER CORD & RUBBER PROTECTION COVER FOR BATTERY



Charger



Li-ion battery



Rubber protection cover
for battery



Programmer



Power cord

Type	Order number
Charger (40 min.)	B84192B
Li-Ion battery 18V 2 Ah	BB180C-320
Li-Ion battery 18V 4 Ah	BB180C-340
Rubber protection cover for battery 18V 2 Ah	C16180C-20
Rubber protection cover for battery 18V 4 Ah	C16180C-40

Type	Order number
Programmer	B74SC180B
Power cord European style	E86B-VD
Power cord English style	E86B-UK